

F8L10T

LoRaWAN Terminal



F8L10T LoRaWAN Terminal is a wireless data transmission terminal based on LoRa Spread Spectrum Communication technology. It can provide wireless data transmission function by LoRaWAN network.

The product uses the high-performance industrial-grade LoRa solution with the embedded real-time operating system as the software support platform. It provides RS232 and RS485 (or RS422) interfaces at the same time, can be connected to the serial devices directly to achieve data pass-through function. The terminal has a low-power design, the minimum power consumption is less than 5mA@12VDC. It provides 5 I/O for implement functions as digital input and output, analog input, pulse counting, etc.

The product has been widely used in the M2M industry of the IoT industrial chain, such as smart grid, intelligent transportation, smart home, finance, mobile POS terminals, supply chain automation, industrial automation, intelligent building, fire protection, public safety, environmental protection, meteorology, digital medical, telemetry, agriculture, forestry, water, coal, petrochemical and other related fields.

HIGHLIGHT

INDUSTRIAL-GRADE DESIGN

- ◆ High-performance industrial-grade chip
- ◆ Low-power design, support multi-level sleep and wake-up mode
- ◆ Metal casing, IP30 protection level, suitable for most industrial control applications.
- ◆ Wide range power input (DC 5~36V)

POWERFUL FUNCTIONS

- ◆ Support OTA upgrade
- ◆ Support WOR to wake up remotely
- ◆ Support multiple baud rates, multiple RF rates
- ◆ Flexible transmission power settings (5~20dBm, 30dBm with PA module)
- ◆ Provides 5 I/O, including 3 analog input, 2 digital input and output, 2 pulse counting.

STABLE & RELIABLE

- ◆ WDT watchdog timer to ensure system stability
- ◆ RS232/RS485/RS422 interface with built-in 15KV ESD
- ◆ Power interface with built-in phase-reversal and over-voltage protection
- ◆ Antenna interface with lightning protection (optional)
- ◆ Automatically split large data packet in transmission, ensure the packet is integral and not lost
- ◆ High-efficiency error detection and correction scheme

STANDARD INTERFACE & EASY-TO-USE

- ◆ Industrial terminal block interface, suitable for industrial applications
- ◆ Standard RS232/RS485/RS422 interface, can be connected to serial devices directly
- ◆ Customizable TTL and ADC serial port
- ◆ Intelligent data terminal, automatically enter transmission status after power-on
- ◆ Easy to use and flexible, has multiple working modes
- ◆ Convenient system configuration and maintenance interface
- ◆ Support upgrade software from the serial port and remote maintenance

SPECIFICATIONS

LORA COMMUNICATION

Protocol	LoRaWAN™
Mode	Class A, Class C
Band	EU433, CN470-510, CN779-787, EU863-870, US902-928, AU915-928, AS923, KR920-923
Urban Communication Distance	F8L10T-N: 1 km F8L10T-E: 2 km
Output Power	F8L10T-N: 20dBm (100mW) F8L10T-E: 30dBm (1W)
Radio Speed Rate	ADR
Sensitivity	-140 dBm

HARDWARE

CPU	Industrial-grade 32-bit processor
FLASH	128 KB
RAM	16 KB

INTERFACE

Serial Port	1*RS232 and 1*RS485 (RS422) interface with built-in 15KV ESD Data bits: 8 bits Stop bits: 1 or 2 bits Parity bits: none, even parity, odd parity
LED Indicators	Power, Communication, LoRa
Antenna	Standard SMA female antenna interface, characteristic impedance: 50 Ω
Power	Terminal block interface with built-in phase-reversal and over-voltage protection

POWER SUPPLY

Standard	12V/0.5A
Range	DC: 5~36 V

POWER CONSUMPTION


F8L10T-N	TXD: 60.3 ~ 61.2mA@12V
	RXD: 13.2 ~ 13.4mA@12V
	Sleep: 3.1 ~ 3.2mA@12V
	TXD: 107.3 ~ 115.1mA@5V
	RXD: 26.1 ~ 26.2mA@5V
F8L10T-E	Sleep: 7.3 ~ 7.4mA@5V
	TXD: 110-125mA@12V
	RXD: 13.2 ~ 13.4mA@12V
	Sleep: 3.1 ~ 3.3mA@12V
	TXD: 210 ~ 213mA@5V
RXD: 26.3 ~ 26.5mA@5V	
Sleep: 7.2 ~ 7.4mA@5V	

PHYSICAL PROPERTIES

Casing	Metal casing, IP30
Dimensions	91 x 58.5 x 22mm
Weight	205g

OTHERS

Operating Temperature	-40~+85 °C (-40~+185°F)
Storage Temperature	-40~+125 °C (-40~+257°F)
Relative Humidity	95% (non-condensing)

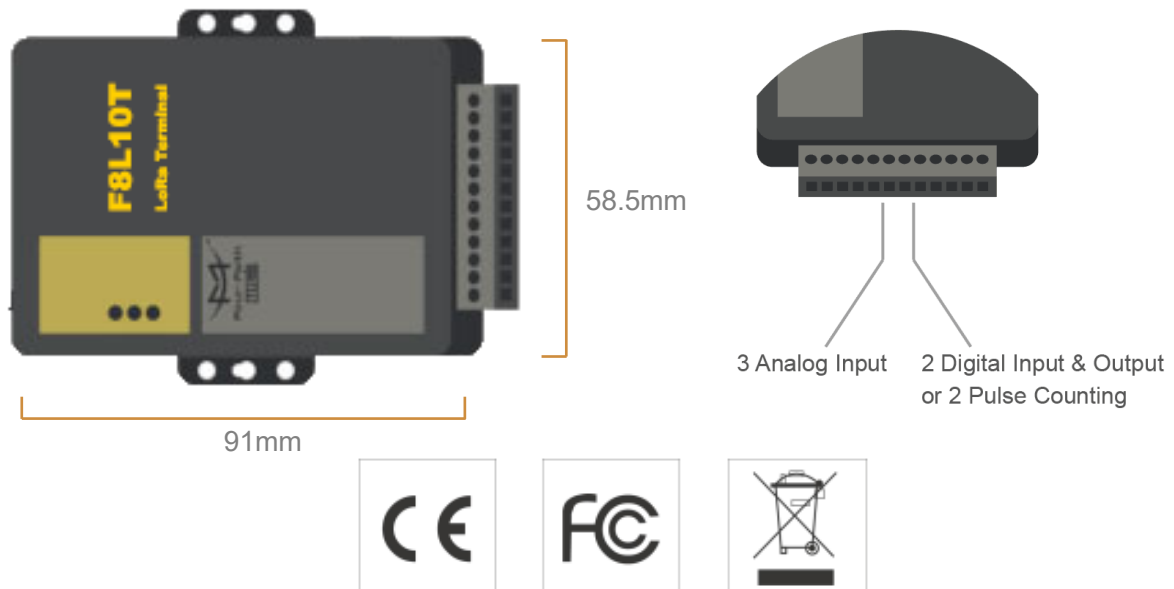

Note: There may be differences between models of accessories and interfaces, actual products shall prevail.

ORDERING

Model	Remark
F8L10T-N	LoRaWAN data transmission terminal
F8L10T-E	LoRaWAN data transmission terminal (With PA*)

CONTACT



Four-Faith Corporation

Email: sales@four-faith.com

Tel.: +86-592-5907276

Website: en.four-faith.com

Address.: 11th Floor, A-06 Area, No.370, Chengyi Street, Jimei, Xiamen, Fujian, China